

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



PCT



(43) International Publication Date  
4 May 2006 (04.05.2006)

(10) International Publication Number  
**WO 2006/045582 A1**

(51) International Patent Classification:

C09D 4/00 (2006.01) G02B 1/11 (2006.01)  
C09D 133/04 (2006.01) B32B 27/28 (2006.01)  
C09D 183/04 (2006.01)

(21) International Application Number:

PCT/EP2005/011415

(22) International Filing Date: 21 October 2005 (21.10.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/621,142 22 October 2004 (22.10.2004) US

(71) Applicant (for all designated States except US): ES-SILOR INTERNATIONAL (COMPAGNIE GENERALE D'OPTIQUE) [FR/FR]; 147 rue de Paris, F-94220 Charenton-le Pont (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): DANG, Hoa Thien [US/US]; 4900 Park Street North, St Petersburg, FL 33709 (US). MOYSAN, Yannick [FR/US]; 4900 Park Street North, St Petersburg, FL 33709 (US).

(74) Agents: CATHERINE, Alain et al.; Cabinet Harlé et Phélip, 7, rue de Madrid, F-75008 Paris (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 2006/045582 A1

(54) Title: SUBSTRATE WITH AN ANTI-SOILING COATING

(57) Abstract: A substrate having at least one main surface comprising a first coating deposited on said main surface and a second coating having anti-soiling properties deposited and adhering on the surface of said first coating, - the first coating being a (meth)acrylate based coating and being obtained by polymerizing a polymerizable composition comprising: i) at least one (meth)acrylate compound and ii) at least one compound I having at least one - M-Z' bond with M representing Si or a Metal atom, Z' representing OH or a hydrolysable group, and at least one ethylenic unsaturated group or epoxy group, and/or iii) at least one silica or metal oxide colloid having free ethylenically unsaturated groups; and the second coating, having anti-soiling properties, being obtained by depositing on said first coating an anti-soiling coating composition comprising at least one compound II, or a hydrolyzate thereof, having at least one - Si-Z" group with Z" representing OH or a hydrolysable group.

## SUBSTRATE WITH AN ANTI-SOILING COATING

This application claims benefit of U.S. Provisional Application No. 60/621,142 filed October 22, 2004, the contents of which are  
5 incorporated herein by reference.

### BACKGROUND OF THE INVENTION

#### 1. Field of the invention

10

The invention relates to substrates coated with a modified (meth)acrylate based coating, providing good scratch resistance along with interfacial adhesion with an anti-soiling coating, especially a fluorinated hydrophobic coating, deposited thereon.

15

The invention also relates to a coating composition comprising a (meth)acrylate based coating composition, usable for obtaining the coated substrate here above mentioned and a corresponding coated substrate able to be coated with an anti-soiling coating.

20

The invention is preferably used for manufacturing ophthalmic lenses coated, especially on their back side (concave side), with the coating of the invention and that subsequently can be treated with an anti-soiling coating.

#### 2. Description of related art

25

It is well known in the field of ophthalmic lenses to apply anti-soiling coatings, especially hydrophobic and/or oleophobic top coats having low surface energy on antireflective (AR) stacks.

30

The anti-soiling has generally reactive groups such as SiO-alkyl groups, Si-Cl, Si-NH<sub>2</sub> or Si-NH- groups that can hydrolyze and react with pendant reactive groups at the surface of the AR.

CONFIRMATION COPY

When the anti-soiling coating is deposited on inorganic AR layers that have been vapour deposited, there is generally no severe problems of adhesion between the AR and the anti-soiling coating.

When the anti-soiling coating is deposited on another coating, especially those of organic nature, such as an abrasion resistant coating, adhesion problems are encountered.

According to the invention, it was found that it is necessary to use a specific coating composition in order to obtain a good adhesion at the interface between the coating and the anti-soiling coating.

10

### **SUMMARY OF THE INVENTION**


A substrate according to the invention is a substrate having at least one main surface comprising a first coating deposited on said main surface and a second coating having anti-soiling properties deposited and adhering on the surface of said first coating,

- the first coating being a (meth)acrylate based coating and being obtained by polymerizing a polymerizable composition comprising :
  - i) at least one (meth)acrylate compound and
  - 20 ii) at least one compound I having at least one - M-Z' bond with M representing Si or a Metal atom, Z' representing OH or a hydrolysable group and at least one ethylenic unsaturated group, or epoxygroup, preferably an ethylenic unsaturated group, and/or
  - iii) at least one silica or metal oxide colloid having free
  - 25 ethylenic unsaturated groups;
- and

- the second coating, having anti-soiling properties, being obtained by depositing on said first coating an anti-soiling coating composition comprising at least one compound II, or a hydrolyzate thereof, having at least one - Si-Z'' group with Z'' representing OH or a hydrolysable group.
- 30

## DETAILED DESCRIPTION OF THE INVENTION AND PREFERRED EMBODIMENTS

By "ethylenic unsaturated group" there is meant a group  
5 comprising a



By "free ethylenic unsaturated group" there is meant a group  
10 comprising the above defined moiety which capable of reacting with the (meth) acrylate compounds of i).

The coating formulation is designed to improve the hydrophobicity which leads to the ease of cleaning.

The main component of the (meth)acrylate based coating  
15 compositions may be chosen between monofunctional (meth)acrylates and multifunctional (meth)acrylates such as difunctional (meth)acrylates; trifunctional (meth)acrylates; tetrafunctional (meth)acrylates, pentafunctional(meth)acrylates, hexafunctional (meth)acrylate.

20 Examples of such monomers are:

Monofunctional (meth)acrylates: Allyl methacrylate, 2-ethoxyethyl acrylate, 2-ethoxyethyl methacrylate, caprolactone acrylate, isobornyl methacrylate, lauryl methacrylate, polypropylene glycol  
25 monomethacrylate.

Difunctional (meth)acrylates: 1,4-butanediol diacrylate, 1,6-hexanediol diacrylate, 1,6-hexanediol dimethacrylate, polyethylene glycol diacrylate, tetraethylene glycol diacrylate, polyethylene glycol  
30 dimethacrylate, polyethylene glycol diacrylate, ethoxylated bisphenol A

diacrylate, tetraethylene glycol diacrylate, tripropylene glycol diacrylate, neopentyl glycol diacrylate, 1,4-butanediol dimethacrylate, tetraethylene glycol dimethacrylate, diethylene glycol diacrylate.

5                      .                      Trifunctional (meth)acrylates: Trimethylolpropane trimethacrylate, Trimethylolpropane triacrylate, pentaerythritol triacrylate, ethoxylated trimethylolpropane triacrylate. Trimethylolpropane trimethacrylate.

10 Tetra to hexa(meth)acrylates: Dipentaerythritol  
pentaacrylate, pentaerythritol tetraacrylate, ethoxylated pentaerythritol  
tetraacrylate, pentaacrylate ester, silicone hexaacrylate.

The preferred compounds I are ethylenically unsaturated alkoxy-  
15 silanes which can be, for example, vinylsilanes, allylsilanes, acrylic silanes or methacrylic silanes.

Examples of vinylsilanes are vinyltri(2-methoxyethoxy)silane, vinyltris(isobutoxy)silane, vinyltri-*t*-butoxysilane, vinyltriphenoxysilane, vinyltrimethoxysilane, vinyltriisopropoxysilane, vinyltriethoxysilane, vinyltriacetoxysilane, vinylmethyldiethoxysilane, vinylmethyldiacetoxysilane, vinylbis(trimethylsiloxy)silane and vinyl dimethoxyethoxysilane.

Examples of allylsilanes are allyltrimethoxysilane, allyltriethoxysilane and allyltris(trimethylsiloxy)silane.

25            Examples            of            acrylic            silanes            are            3-  
acryloxypropyltris(trimethylsiloxy)silane,            3-  
acryloxypropyltrimethoxysilane, acryloxypropylmethyldimethoxysilane, 3-  
acryloxypropylmethylbis(trimethylsiloxy)silane,            3-acryloxypropyl-  
dimethylmethoxysilane,            n-(3-acryloxy-2-hydroxypropyl)-3-  
30            aminopropyltriethoxysilane.

Examples of methacrylic silanes are 3-methacryloxypropyltris  
 (vinyl dimethoxysiloxy)silane, 3-  
 methacryloxypropyltris(trimethylsiloxy)silane, 3-  
 methacryloxypropyltris(methoxyethoxy)silane, 3-  
 5 methacryloxypropyltrimethoxysilane, 3-  
 methacryloxypropylpentamethyldisiloxane, 3-methacryloxypropylmethyl-  
 dimethoxysilane, 3-methacryloxypropylmethyldiethoxysilane, 3-  
 methacryloxypropyl-dimethylmethoxysilane, 3-  
 methacryloxypropyldimethylethoxysilane, 3-  
 10 methacryloxypropenyltrimethoxysilane and 3-  
 methacryloxypropylbis(trimethylsiloxy)methylsilane.

The preferred silane is acryloxypropyltrimethoxysilane.

Other preferred compounds of formula I are zirconium  
 methacrylate, titanium trimethacrylate,  
 15 methacryloxyethoxytriisopropoxytitanate, titanium methacrylate  
 triisopropoxide, zirconium methacryloxyethyl acetoacetate tri-n-propoxide.

Silica colloids having free ethylenically unsaturated groups are for  
 example: OG-103 silica colloids functionalized with hexanedioldiacrylate.

Among the epoxyalkoxy silanes usable as compounds I there may  
 20 be cited  $\gamma$ -glycidoxypropylpentrimethyldisiloxane,  $\gamma$ -  
 glycidoxypropylmethyldiisopropenoxysilane, ( $\gamma$ -glycidoxypropyl)-  
 methyldiethoxysilane,  $\gamma$ -glycidoxypropylmethylethoxysilane,  $\gamma$ -  
 glycidoxypropyldiisopropylethoxysilane and ( $\gamma$ -glycidoxypropyl)bis-  
 (trimethylsiloxy)methylsilane.

25 The preferred epoxyalkoxysilane is ( $\gamma$ -  
 glycidoxypropyl)trimethoxysilane.

Examples of useful alkoxysilanes are tetraethoxysilane and  
 methyltrimethoxysilane.

Of course, mixtures of ethylenically unsaturated alkoxysilanes and  
 30 epoxyalkoxy silanes as above may be used as compounds I.

The (meth)acrylate coating composition can also comprise:

1) Metal alkoxides without ethylenically unsaturated groups, for example tetraethoxysilane (semi-metal), zirconium propoxides, 5 zirconium isopropoxide, , tungsten VI ethoxide, tungsten V ethoxide, titanium n-propoxide, 2- titanium isobutoxide, tantalum V ethoxide, indium methyl trimethyl acetyl acetate, hafnium ethoxide, hafnium butoxide, germanium ethoxide, germanium butoxide, cerium butoxide, antimony butoxide, aluminum butoxide, tungsten ethoxide.

10 These metal alkoxides enhance the effect of compound I or of the silica or metal colloids having free ethylenically unsaturated groups.

2) Alkoxysilanes.

Examples of useful alkoxysilanes are tetraethoxysilane and 15 methyltrimethoxysilane.

3) Non silane epoxy compounds:

1,4-butanediol diglycidyl ether, bisphenol F epoxy, bisphenol A epoxy, epoxy phenol novalac, alicyclic diepoxy carbonate. Propylene 20 glycol glycidyl ether, cycloaliphatic diepoxide, 2,4, oxirane-2-ylmethoxybutoxymethyl oxirane, 2,2,2-bis oxirane-2-yloxymethylbutoxyoxirane.

Preferably, the (meth)acrylate based curable coating composition 25 is photocurable, preferably UV curable.

Preferably, the (meth)acrylate based curable coating composition comprises a surfactant that can be covalently bounded to the polymer matrix of the (meth)acrylate based curable composition. This surfactant is preferably an acrylated silicone oligomer and is used in a weight ratio 30 less than 2%, based on the total weight of the composition, preferably in

a weight of 1% or less. Of course, the acrylated silicone oligomers used as surfactant ratio are compounds different from compounds I.

The (meth)acrylate based curable layer can be used as a hard coating that has a thickness of preferably 1 to 6 microns, and better  
5 between 2 to 5 microns with a nominal thickness of 3 microns for the ophthalmic lens application.

It may be deposited directly on the surface of a substrate or on a primer coating, preferably an impact resistant primer coating.

Also, the (meth)acrylate based curable layer can be used as a  
10 primer layer that has preferably a thickness from 0.5 to 2 microns, and better less than 1.0 microns.

Generally, the anti-soiling coating will have a surface energy of less than 15 mJ/m<sup>2</sup>, preferably less than 14 mJ/m<sup>2</sup> and more preferably less than 13 mJ/m<sup>2</sup>, and even better less than 12 mJ/m<sup>2</sup> and a thickness  
15 of 1 to 100 nm, preferably 1 to 60 nm, more preferably 10 to 60 nm. The anti-soiling coating may also be as thin as 1 to 10 nm, preferably 1 to 5 nm.

In the present invention, all surface energies are calculated according to the OWENS-WENDT method described in the following  
20 document: "Estimation of the surface forces energy of polymers" OWENS D.K., WENDT R.G. (1969) J. APPL. POLYM, SCI., 13, 1741-1747.

The anti-soiling coating layer may be any classical outer coating in the field of optical lenses and in particular an anti-soiling coating (hydrophobic and/or oleophobic top coat).

25 The anti-soiling coating layer according to the invention is preferably of organic nature. By organic nature in the present invention, it is meant a layer which is comprised of at least 40% by weight, preferably at least 50% by weight of the total weight of the coating layer of organic materials.




A preferred anti-soiling coating layer is a hydrophobic and/or oleophobic top coat, and preferably such a top coat made from a composition comprising at least one fluorinated compound.




Preferred fluoro compounds are silanes and silazanes bearing at least one group selected from fluorocarbons, polyfluorocarbons, fluoropolyethers and polyfluoropolyethers, in particular perfluoropolyethers.

Fluorocompounds are disclosed, among others, in US-4,410,563, EP-0 203 730, EP-749 021, EP-844 265 and EP-933 377.

Among fluorosilanes there may be cited the compounds of formulae:

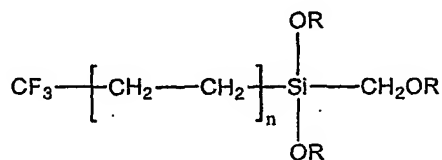


$n = 5, 7, 9$  or  $11$  and  $R$  is an alkyl radical, typically a  $C_1$ - $C_6$  alkyl radical such as  $-\text{CH}_3$ ,  $-\text{C}_2\text{H}_5$  and  $-\text{C}_3\text{H}_7$ ;

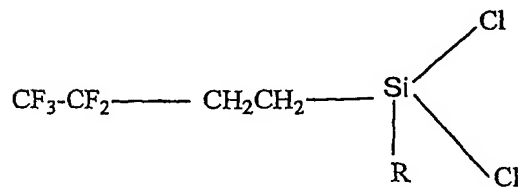

$n' = 7$  or  $9$  and  $R$  is as defined above.

Compositions containing fluoro compounds also useful for making the top coat are disclosed in US 6,183,872.

5           The silicon-containing organic fluoropolymer is represented by the  
general formula (I) and has a number average molecular weight of from  
5x10<sup>2</sup> to 1x10<sup>5</sup>.

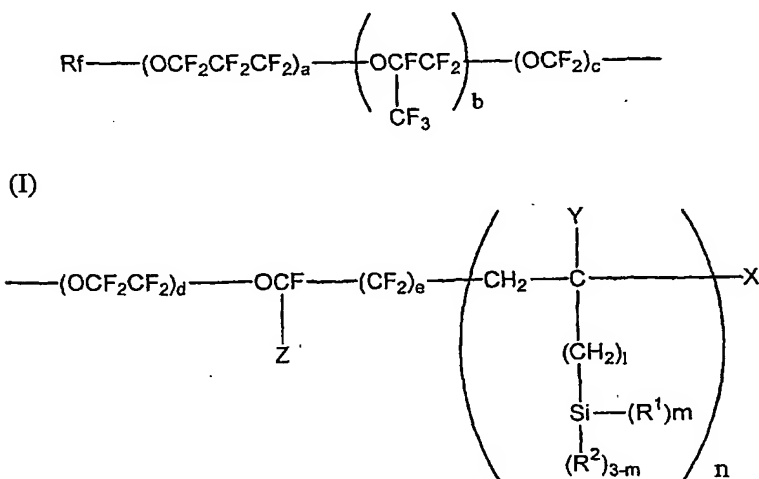


10

wherein Rf represents perfluoroalkyl ; Z represents fluoro or trifluoromethyl ; a, b, c, d and e each independently represent 0 or an integer of 1 or above, provided that  $a + b + c + d + e$  is not less than 1 and the order of the repeating units parenthesized by subscripts a, b, c, d and e occurring in the formula is not limited to that shown ; Y represents hydrogen or alkyl containing 1 to 4 carbon atoms ; X represents hydrogen, bromo or iodo ; R<sup>1</sup> represents hydroxy or a hydrolyzable substituent group ; R<sup>2</sup> represents hydrogen or a monovalent hydrocarbon group ; l represents 0, 1 or 2 ; m represents 1, 2 or 3 ; and n represents an integer of 1 or above, preferably 2 or above.

Other classes of preferred compositions for forming the initial top coat are those containing fluoropolyether groups, in particular polyfluoropolyether groups and in particular perfluoropolyether groups. A particular preferred class of compositions containing fluoropolyether groups is disclosed in US-6,277,485.

The anti-soiling top coats of US-6,277,485 are at least partially cured coatings comprising a fluorinated siloxane prepared by applying a coating composition (typically in the form of a solution) comprising at least one fluorinated silane of the following formula :



wherein :  $R_f$  is a monovalent or divalent polyfluoropolyether group,  $R^1$  is a divalent alkylene group, arylene group, or combinations thereof, optionally containing one or more heteroatoms or functional groups and optionally substituted with halids, and preferably containing 2 to 16 carbon atoms ;  $R^2$  is a lower alkyl group (i.e., a (C<sub>1</sub>-C<sub>4</sub>) alkyl group) ; Y is a halide, a lower alkoxy group (i.e., a (C<sub>1</sub>-C<sub>4</sub>) alkoxy group, preferably, a methoxy or ethoxy group), or a lower acyloxy group (i.e., -OC(O)R<sup>3</sup> wherein R<sup>3</sup> is a (C<sub>1</sub>-C<sub>4</sub>) alkyl group) ; x is 0 or 1 ; and y is 1 ( $R_f$  is monovalent) or 2 ( $R_f$  is divalent). Suitable compounds typically have a molecular weight (number average) of at least about 1000. Preferably, Y is a lower alkoxy group and  $R_f$  is a perfluoropolyether group.

A commercial composition for making the top coat is the composition KP 801M® commercialized by SHINETSU, or the Optool DSX® product from DAIKIN.

Generally, the anti-soiling coating layer of the coated lens has a thickness ranging from 1 to 100 nm, preferably 1 to 60 nm, more preferably 1 to 5 nm.

The deposition techniques for such anti-soiling coating layers are very diverse, including liquid phase deposition such as dip coating, spin coating (centrifugation). Of which, deposition by dip coating is preferred.

Preferably a plasma or corona treatment may be used for increasing the adhesion between the first and the second layer.

The lens substrate can be made from any material used in the optical field, such as mineral or organic glass, preferably an organic glass.

Examples of such lens substrates are:

- diethylene glycol bis(allylcarbonate) polymers and copolymers based substrates ;
- (meth)acrylic polymers and copolymers based substrates, such as substrates comprising (meth)acrylic polymers and copolymers derived from bisphenol-A ;
- thio(meth)acrylic polymers and copolymers based substrates ;
- polythiourethane polymers and copolymers based substrates ;
- epoxy and/or episulfide polymers and copolymers based substrates ; and
- polycarbonate based substrates.

In all the examples below the first based methacrylic coating was treated by corona discharge prior to deposition of the second coating having anti-soil properties.

#### EXAMPLES

**EXAMPLE 1 (Comparative):** This coating formulation is used as a reference for a typical UV curable coating.

A coating formulation consisted of:

Components	% weight/weight
Diethylene glycol diacrylate	48.74
Dipentaerythritol pentaacrylate	48.74
Acrylated silicone Oligomer (Ebecryl 1360)	0.53
Photo-initiator (Irgacure 500)	1.99

Preparation:

5           1-    12.01 grams of diethylene glycol diacrylate were poured in  
a tube vial.

          2-    12.01 grams of dipentaerythritol pentaacrylate were added  
to diethylene glycol diacrylate while mixing. Then the blend was mixed for  
30 minutes.

10          3-    0.13 grams of Ebecryl 1360 were added to the previous  
blend while mixing. Then the blend was mixed for 30 minutes.

          4-    0.49 grams of Irgacure 500 were added to the previous  
blend while mixing. Then the blend was finally mixed for 30 minutes.

15          Coating was spin coated on a polycarbonate lens 10 seconds at  
speed 4000 rpm and cured via Lesco system H+ U.V. Bulb during 2  
times 35 seconds.

          The same coating was spin coated on a CR-39® lens 10 seconds  
at speed 4000 rpm and cured via Lesco system H+ U.V. Bulb during 2  
20 times 35 seconds.

          Next, the coated sample was treated with a fluorinated anti soiling  
agent (Optool DSX® from DAIKIN).

          Subsequently, the sample was cured for 1 hour at 50°C.

25

**EXAMPLE 2:**

Acryloxypropyl trimethoxysilane is added to a UV curable acrylic coating.

5 A UV curable coating formulation that consisted of:

Components	% weight/weight
Acryloxypropyltrimethoxysilane	22.80
Hydrochloric acid (0.1N)	5.27
Diethylene glycol diacrylate	35.08
Dipentaerythritol pentaacrylate	35.09
Acrylated silicone Oligomer (Ebecryl 1360)	0.34
Photo-initiator (Irgacure 500)	1.43

Preparation of the coating composition:

10 1- 38.99 grams of acryloxypropyltrimethoxysilane were poured in a beaker.

2- 9.00 grams of hydrochloric acid solution at 0.1 mole.L<sup>-1</sup> were slowly added to acryloxypropyltrimethoxysilane while mixing. Then the hydrolysis was stopped after 2 hours.

15 3- 59.99 grams of diethylene glycol diacrylate were added while mixing. Then this blend was mixed for 30 minutes.

4- 60.01 grams of dipentaerythritol pentaacrylate were added while mixing. Then this blend was mixed for 30 minutes.

20 5- 0.58 grams of Ebecryl 1360 were added while mixing. Then this blend was mixed for 30 minutes.

6- 2.45 grams of Irgacure 500 were added while mixing. Then the blend was finally mixed for 30 minutes.

25 Coating was spin coated on a polycarbonate lens 10 seconds at speed 4000 rpm and cured via Lesco system H+ U.V. Bulb during 2 times 35 seconds.

The same coating was spin coated on CR-39® lens 10 seconds at speed 4000 rpm and cured via Lesco system H+ U.V. Bulb during 2 times 35 seconds.

- 5        Next, the coated lens was treated with a fluorinated top coating Optool (DSX) solution by dip coating.

Subsequently the treated lenses were cured for 50 minutes at 100°C.

10        **EXAMPLE 3:**

Functionalized particles of acrylated colloid silica are added to a UV curable acrylic coating.

A UV curable coating formulation that consisted of:

15

Components	% weight/weight
Acrylated colloid silica (OG 103-31)	24.04
Diethylene glycol diacrylate	37.07
Dipentaerythritol pentaacrylate	37.01
Acrylated silicone Oligomer (Ebecryl 1360)	0.37
Photo-initiator (Irgacure 500)	1.51

Preparation of the coating composition:

- 1-        7.79 grams of acrylated colloid silica (OG 103-31) were poured  
20        in a beaker.
- 2-        12.01 grams of diethylene glycol diacrylate were added while  
mixing. Then this blend was mixed for 30 minutes.
- 3-        11.99 grams of dipentaerythritol pentaacrylate were added while  
mixing. Then this blend was mixed for 30 minutes.
- 25        4-        0.12 grams of Ebecryl 1360 were added while mixing. Then this  
blend was mixed for 30 minutes.

5- 0.49 grams of Irgacure 500 were added to the previous blend. Then the blend was finally mixed for 30 minutes.

Coating was spin coated on a polycarbonate lens 10 seconds at speed 4000 rpm and cured via Lesco system H+ U.V. Bulb during 2 times 35 seconds.

The same coating was spin coated on CR-39® lens 10 seconds at speed 4000 rpm and cured via Lesco system H+ U.V. Bulb during 2 times 35 seconds.

Next, the sample was coated with a fluorinated anti-soiling agent (Optool DSX® from DAIKIN) top coating solution by dip coating. Subsequently, the samples were cured for 1 hour at 50°C.

#### EXAMPLE 4:

A hybrid of organic silane is added to a UV curable acrylic coating. This hybrid additive is designed to be subsequently reacting with the DSX and form a strong bond through silanol condensation.

A UV curable coating formulation that consisted of:

Components	% weight/weight
Acryloxypropyltrimethoxysilane	22.80
Hydrochloric acid (0.1N)	5.27
Diethylene glycol diacrylate	35.08
Dipentaerythritol pentaacrylate	35.09
Acrylated silicone Oligomer (Ebecryl 1360)	0.34
Photo-initiator (Irgacure 500)	1.43

20

Preparation of the coating composition:

1- 38.99 grams of acryloxypropyltrimethoxysilane were poured in a beaker.



- 2- 9.00 grams of hydrochloric acid solution at  $0.1 \text{ mole.L}^{-1}$  were slowly added to acryloxypropyltrimethoxysilane while mixing. Then, the hydrolysis was stopped after 2 hours.
- 3- 59.99 grams of diethylene glycol diacrylate were added while mixing.
- 5 Then this blend was mixed for 30 minutes.
- 4- 60.01 grams of dipentaerythritol pentaacrylate were added while mixing. Then this blend was mixed for 30 minutes.
- 5- 0.58 grams of Ebecryl 1360 were added while mixing. Then this blend was mixed for 30 minutes.
- 10 6- 2.45 grams of Irgacure 500 were added to the previous blend while mixing. Then the blend was finally mixed for 30 minutes.

Coating was spin coated on a polycarbonate lens 10 seconds at speed 4000 rpm and cured via Lesco system H+ U.V. Bulb during 2  
15 times 35 seconds.

The same coating was spin coated on CR-39® lens 10 seconds at speed 4000 rpm and cured via Lesco system H+ U.V. Bulb during 2 times 35 seconds.

Next, the coated lens was treated with a fluorinated material  
20 Optool DSX® from DAIKIN by dip coating method.

Subsequently the treated lenses were cured for 1 minute at  $70^{\circ}\text{C}$  by infra-red heater.

#### EXAMPLE 5:

25 A hybrid of organic silane is added to a UV curable acrylic coating. This hybrid additive is designed to be subsequently reacting with the DSX and form a strong bond through silanol condensation.

A UV curable coating formulation that consisted of:

Components	% weight/weight
glycidoxypropyltrimethoxysilane	21.68
Acryloxypropyltrimethoxysilane	21.54
Hydrochloric acid (0.1N)	11.58
Diethylene glycol diacrylate	22.07
Dipentaerythritol pentaacrylate	22.07
Acrylated silicone Oligomer (Ebecryl 1360)	00.18
Photo-initiator (Irgacure 500)	00.88

Formulation :

- 5 1- 5.90 grams of acryloxypropyltrimethoxysilane were poured in a beaker.
- 2- 5.86 grams of glycidoxypropyltrimethoxysilane were poured in a beaker.
- 10 3- 3.15 grams of hydrochloric acid solution at 0.1 mole.L<sup>-1</sup> were slowly added to acryloxypropyltrimethoxysilane and glycidoxypropyltrimethoxysilane while mixing. Then, the hydrolysis was stopped after 2 hours.
- 4- 6.00 grams of diethylene glycol diacrylate were added while mixing. Then this blend was mixed for 30 minutes.
- 15 5- 6.00 grams of dipentaerythritol pentaacrylate were added while mixing. Then this blend was mixed for 30 minutes.
- 6- 0.05 grams of Ebecryl 1360 were added while mixing. Then this blend was mixed for 30 minutes.
- 20 7- 0.24 grams of Irgacure 500 were added to the previous blend while mixing. Then the blend was finally mixed for 30 minutes.

Coating was spin coated on a polycarbonate lens 10 seconds at speed 4000 rpm and cured via Lesco system H+ U.V. Bulb during 2 times 35 seconds.

The same coating was spin coated on a CR-39™ lens 10 seconds at speed 4000 rpm and cured via Lesco system H+ U.V. Bulb during 2 times 35 seconds.

- 5        Next, the lenses were coated with a fluorinated solution (0.60% Optool DSX™ within Demnum™ solvent) top coating solution by dip coating technique.

Subsequently the treated lenses were cured for 1 minute at 90°C by infra-red heater.

10

### Results

The lenses obtained according to examples 1-5:

EXAMPLE	INITIAL WATER CONTACT ANGLE BEFORE DSX TREATMENT (degrees)	AFTER SOLVENT WASH CONTACT ANGLE (degrees) 30 min. / 60 min.	AFTER CAUSTIC HYDROLYSIS CONTACT ANGLE (degrees) 1 min. / 30 min.
Example 1 (comparative)	70.4	64.7 / 61.7	51.2 / 53.5
Example 2	112.7	113.7 / 115.0	111.5 / 112.9
Example 3	115.3	116.2 / 114.7	117.6 / 117.3
Example 4	113.5	115.0 / 117.2	116.4 / 112.2
Example 5	72.49		107 / 107

- 15        Based on the examples 2 to 4 and comparative example 1, it appears clearly that the contact angle is initially lower in comparative example 1, and moreover that there is a big decrease of the contact angle when the substrates are washed by solvent or treated with a caustic solution for comparative example 1, demonstrating a lower
- 20        adhesion of the anti-soiling agent.

**WHAT IS CLAIMED IS:**

1- A substrate having at least one main surface comprising a first  
5 coating deposited on said main surface and a second coating having  
anti-soiling properties deposited and adhering on the surface of said first  
coating,

- the first coating being a (meth)acrylate based coating and  
10 being obtained by polymerizing a polymerizable composition comprising:

i) at least one (meth)acrylate compound and

ii) at least one compound I having at least one - M-Z' bond with M  
representing Si or a Metal atom, Z' representing OH or a hydrolysable  
group, and at least one ethylenic unsaturated group or epoxy group,

15

and/or

iii) at least one silica or metal oxide colloid having free  
ethylenically unsaturated groups;

20

and

- the second coating, having anti-soiling properties, being  
obtained by depositing on said first coating an anti-soiling coating  
composition comprising at least one compound II, or a hydrolyzate  
25 thereof, having at least one - Si-Z'' group with Z'' representing OH or a  
hydrolysable group.

2- A substrate according to claim 1, wherein the polymerizable first  
coating composition comprises at least one metal alkoxide compound  
30 that do not contain any reactive unsaturated group.

3- A substrate according to claim 1, wherein compound I is a colloidal silica having free acryloxy groups.

4- A substrate according to claim 1, wherein the polymerizable first coating composition comprises from 2 to 50% by weight of compound I.

5- A substrate according to claim 1, wherein the polymerizable first coating composition comprises from 10 to 40% by weight of compound I.

6- A substrate according to claim 1, wherein the unsaturated group is a (meth)acryloxy group or a vinyl group.


7- A substrate according to claim 1, wherein the second coating having anti-soiling properties is hydrophobic and/or oleophobic.

8- A substrate according to claim 1, wherein compound II is a fluoro compound.


9- A substrate according to claim 3, wherein compound II is a silane or a silazane bearing at least one group selected from fluorocarbons, polyfluorocarbons, fluoropolyethers and polyfluoropolyethers.

10- A substrate according to claim 1, wherein compound II is a silane comprising polyfluoro polyether groups.

11- A substrate according to claim 1, wherein compound II is represented by the general formula (I) and has a number average molecular weight of from  $5 \times 10^2$  to  $1 \times 10^5$ .



(I)

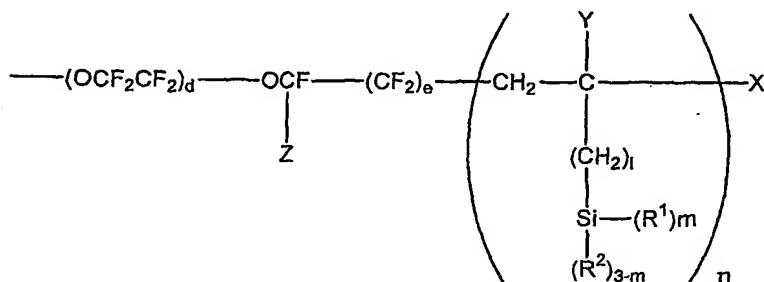

wherein Rf represents perfluoroalkyl ; Z represents fluoro or trifluoromethyl ; a, b, c, d and e each independently represent 0 or an integer of 1 or above, provided that a + b + c + d + e is not less than 1 and the order of the repeating units parenthesized by subscripts a, b, c, d and e occurring in the formula is not limited to that shown ; Y represents hydrogen or alkyl containing 1 to 4 carbon atoms ; X represents hydrogen, bromo or iodo ; R<sup>1</sup> represents hydroxy or a hydrolyzable substituent group ; R<sup>2</sup> represents hydrogen or a monovalent hydrocarbon group ; l represents 0, 1 or 2 ; m represents 1, 2 or 3 ; and n represents an integer of 1 or above, preferably 2 or above.

12- A substrate according to claim 1, wherein the second coating  
15 having anti-soiling properties is deposited by dip coating or spin coating,  
preferably by dip coating.

13- A coating composition comprising:

- 20            i)        at least one (meth)acrylate compound and  
              ii)        at least one compound I having

at least one - M-Z' bond with M representing Si or a Metal atom, Z'  
representing OH or a hydrolysable group,  
and at least one ethylenic unsaturated group or epoxy group  
and/or

- 5       iii) at least one silica or metal oxide colloid having free  
ethylenically unsaturated groups.

## INTERNATIONAL SEARCH REPORT

International Application No.  
PCT/EP2005/011415

## A. CLASSIFICATION OF SUBJECT MATTER

C09D4/00 C09D133/04 C09D183/04 G02B1/11 B32B27/28

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C09D C08F C08J G02B B29D B32B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,Y	EP 0 442 305 A (GENERAL ELECTRIC COMPANY) 21 August 1991 (1991-08-21) examples, claim 1	1-13
X,Y	WO 01/67139 A (ESSILOR INTERNATIONAL) 13 September 2001 (2001-09-13) claims 15-26 page 8, lines 3-5 example 4	1-13
X,Y	US 5 614 321 A (MEDFORD ET AL) 25 March 1997 (1997-03-25) claim 1 column 1, lines 49-51 masterbatch 1	1-13
	----- -/-- -----	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

11 January 2006

Date of mailing of the international search report

18/01/2006

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel: (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Knutzen-Mies, K



# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP2005/011415

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 096 626 A (TAKAMIZAWA ET AL) 17 March 1992 (1992-03-17) claim 11 example 4	1-12

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2005/011415

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0442305	A	21-08-1991	CA 2034436 A1	17-08-1991
			DE 69105538 D1	19-01-1995
			DE 69105538 T2	20-07-1995
			JP 4214743 A	05-08-1992
			JP 6099577 B	07-12-1994
			US 5426131 A	20-06-1995
			US 5258225 A	02-11-1993
WO 0167139	A	13-09-2001	AU 4075701 A	17-09-2001
			CA 2373106 A1	13-09-2001
			EP 1175630 A1	30-01-2002
			FR 2805901 A1	07-09-2001
			JP 2003526810 T	09-09-2003
US 5614321	A	25-03-1997	US 5827923 A	27-10-1998
US 5096626	A	17-03-1992	NONE	